
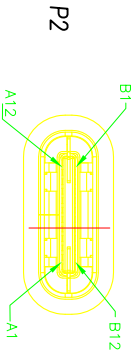


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

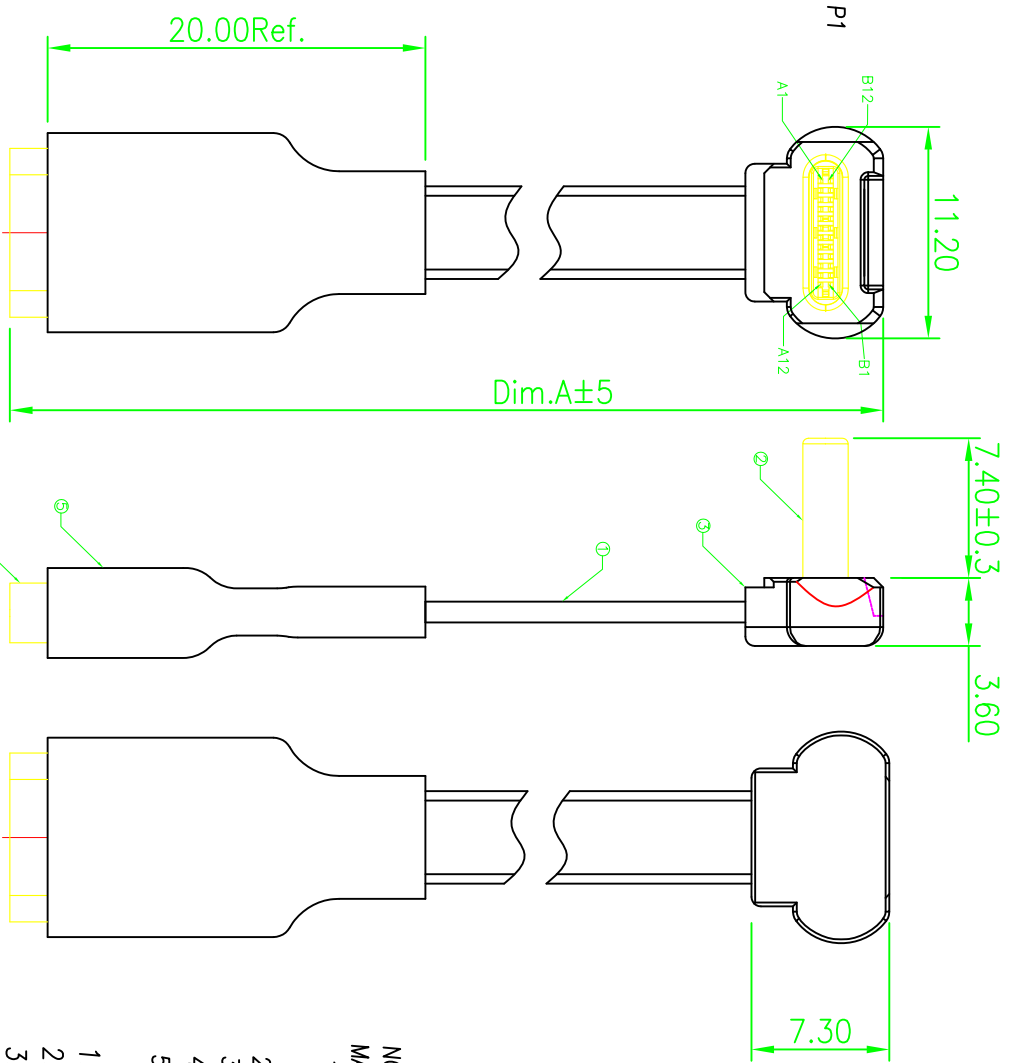

Dimension Information

300	1220811AP503
200	1220811AP502
66	1220811AP501
Dim.A	Part No.

WIRING DIAGRAM

P1(1021614AP020/021)	P2(1021615AP004)
A4,B4,A9,B9	A4,B4,A9,B9
A7	A7-B7
A6	A6-B6
A5	A5-B5
A1,B1,A12,B12	A1,B1,A12,B12
	GND
	VCC
	D-/DM
	D+/DP
	CC

NOTE:

- MATERIAL:
- CABLE: Flat Cbde Enameled wire (8/0.08EC+Nylon)*3C+ (30*0.08EC+Nylon)*2C 4.9*1.2mm Black Wire;TPE;
 - Connector: USB Type C/M SOLDER TYPE,G/F(1021614AP020/021)
 - Mold Material: Customized Plastic, Color: Black;Mold No. C1545
 - Connector:USB Type C/F Sloder type,G/F(1021615AP004)
 - Heat shrink tubing
- Electrical Test Conditions:
- Conduction Test:100% qualified,No Open/Short circuit phenomenon
 - Current:3.0A
 - Voltage:DC 30V
 - Insulation resistance: 5 Million ohm Min
 - Patent number:ZL2022 2 2499175.4

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	JAME	2024.04.18

UNLESS OTHERWISE SPECIFIED TOLERANCES	TITLE: USB Type C/F TO Type C/M T头5C数据线
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2	ANGLES: X :±2° X.X :±1° X.XX :±0.2
	PART NO. 1220811AP5XX
	DWN JAME
	CHKD 2024.04.19
	APVD
SCALE 1:1	UNIT: mm
CUSTOMER COPY	SIZE: A4 SHEET: 10F1 REV: B