
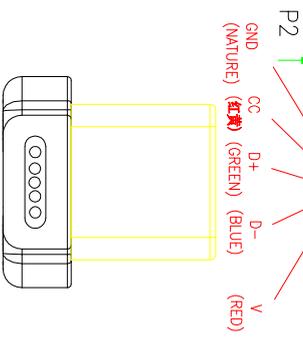


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

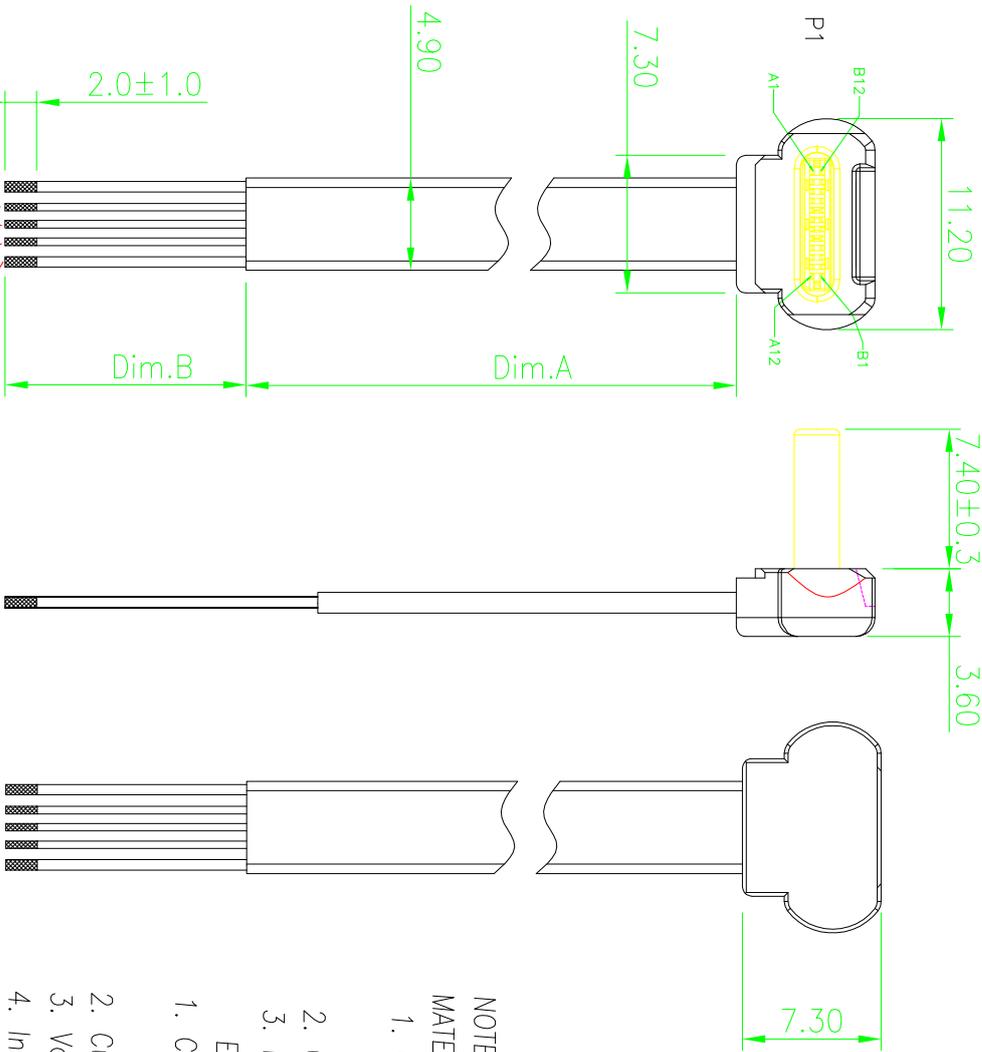

Dimension Information

60±5	10.0±3	1220807AP505
342.7±5	10.0±3	1220807AP504
140±3	10.0±3	1220807AP503
100.0±3	10.0±3	1220807AP502
60.0±3	25.0±3	1220807AP501
Dim.A	Dim.B	Part No.

WIRING DIAGRAM

P1(T-141/140)	P2	
A4,B4,A9,B9	Red	VCC
A7	Blue	D-/DM
A6	Green	D+/DP
A5	A5	CC
A1,B1,A12,B12	Nature	GND

NOTE:

MATERIAL:

- CABLE: Flat Cable Enameled wire (10/0.08EC+Nylon)\*3C+ (30\*0.08EC+Nylon)\*2C 4.9\*1.2mm Black Wire, 70A TPE;
  - Connector: USB Type C 24P/M SOLDER TYPE,G/F(1021614AT020)
  - Mold Material: Customized Plastic, Color: Black,Mold No. C1545
- Electrical Test Conditions:
- Conduction Test:100% qualified,No Open/Short circuit phenomenon
  - Current:3.0A
  - Voltage:DC 30V
  - Insulation resistance: 5 Million ohm Min
  - Internal resistance of wire rod per wire: 120 Micro ohm Max
  - The LLCR of the plug is not included.
  - Patent number:ZL2022 2 2499175.4

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1'
X.XX :±0.2	

TITLE: USB TYPE C T头5C充电数据软扁线

PART NO.	1220807AP5XX
DWG	JER/YS
CHKD	2023.09.25
APVD	
SCALE 1:1	UNIT: mm
CUSTOMER COPY	SIZE: A4 SHEET: 10F1 REV: A

