



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

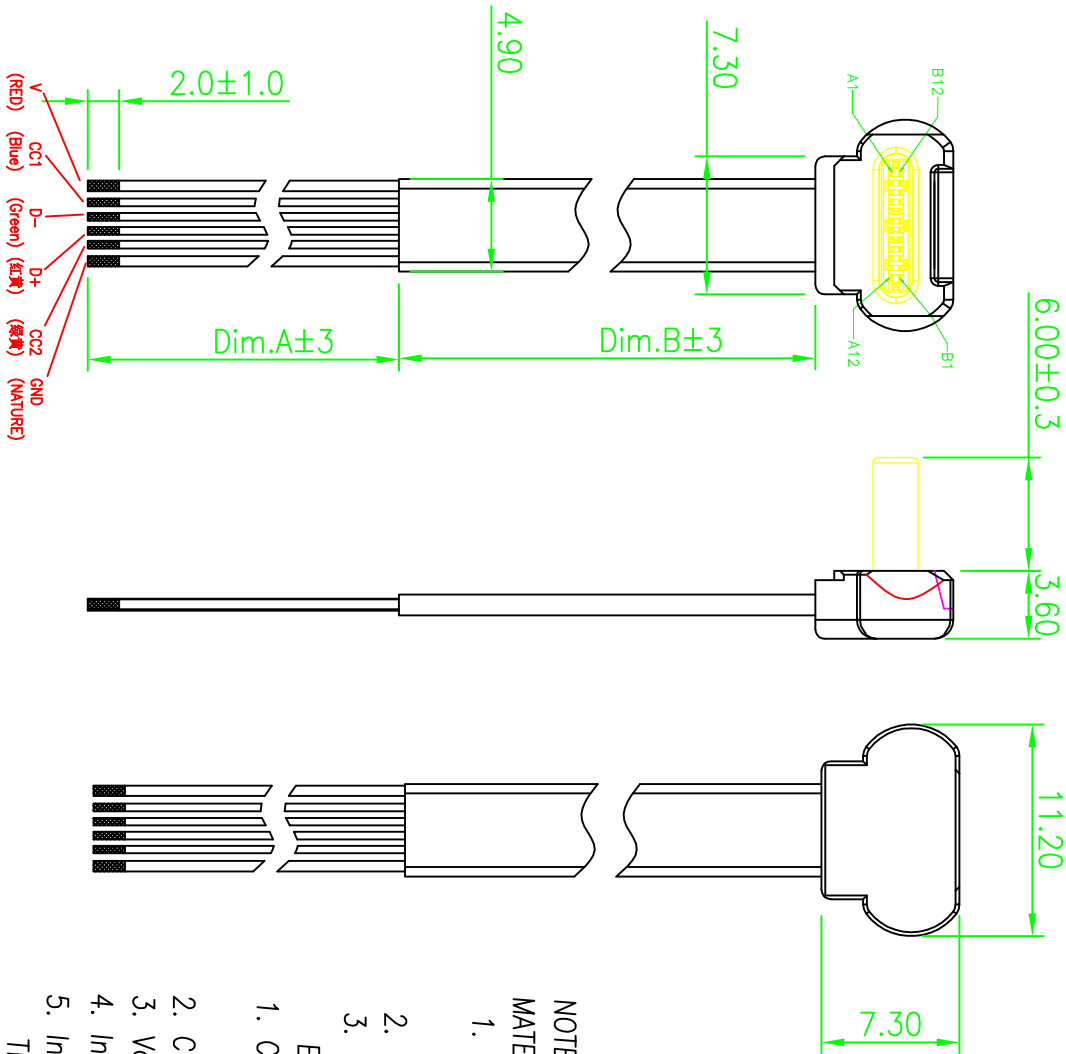

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	JERNIS	2022.06.15
B		Change from 100 to 85	JERNIS	2023.02.25

Dimension Information

393.0±3	7.0±3	1220807AP602
40.0±3	45.0±3	1220807AP601
Dim.A	Dim.B	Part No.

NOTE:

MATERIAL:

- CABLE: Flat Cable Enameled wire (10/0.08EC+Nylon)*4C+ (30*0.08EC+Nylon)*2C 4.9*1.2mm Black Wire, 70A TPE;
 - Connector: USB Type C 16P/M SOLDER TYPE,G/F(1021614AT001)
 - Mold Material: Customized PVC, Color: Black.Mold No.C1545
- Electrical Test Conditions:
- Conduction Test:100% qualified,No Open/Short circuit phenomenon
 - Current:3.0A
 - Voltage:DC 30V
 - Insulation resistance: 5 Million ohm Min
 - Internal resistance of wire rod per wire: 120 Micro ohm Max
 - The LLCR of the plug is not included.
 - Patent number:ZL2022 2 2499175.4

UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: USB TYPE C 1头6C充电数据单头软扁线	
DECIMALS:	ANGLES:	PART NO.	1220807AP6XX
X : ±0.5	X : ±2°	DWN	JERNIS
X.X : ±0.3	X.X : ±1'	CHKD	2023.02.25
X.XX : ±0.2		APVD	

CUSTOMER COPY		SCALE 1:1		UNIT: mm	SHEET: 10/1	REV: B
PRECISION ELECTRONICS		TETULLO				