

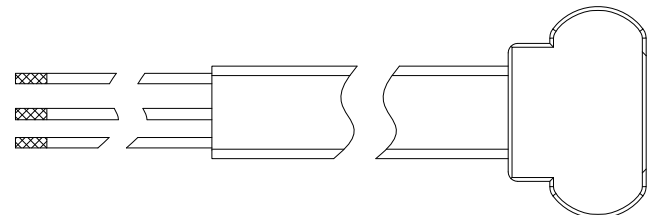
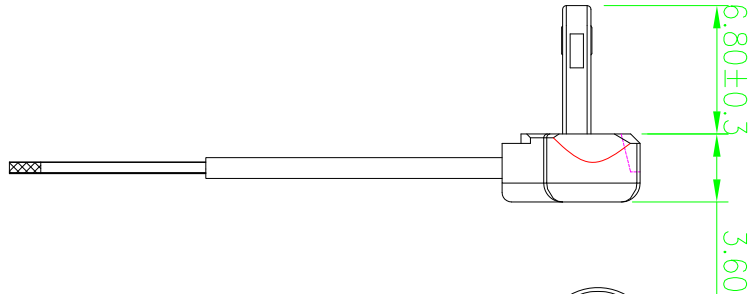
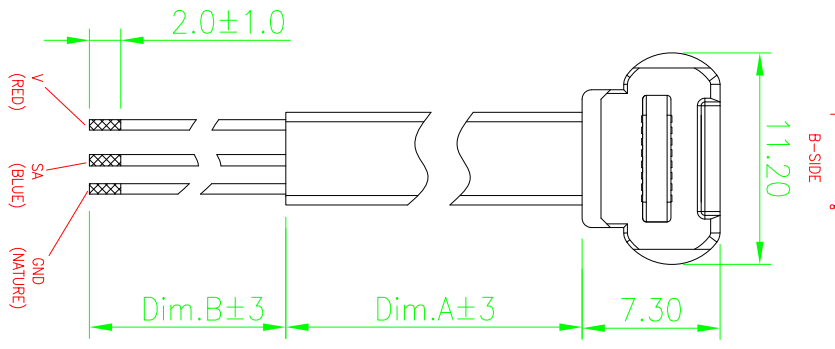



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.



Dimension Information

140.0±3	10.0±3	1220808AP302
70.0±3	30.0±3	1220808AP301
Dim.A	Dim.B	Part No.

WIRING DIAGRAM

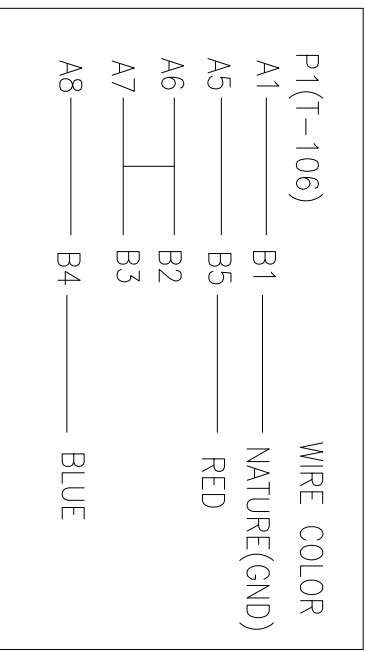

NOTE:

- MATERIAL:
- CABLE: Flat Cable Enameled wire (10/0.08EC+Nylon)*1C+(30/0.08 EC+NYLON)*2C 4.9*1.2mm Black Wire Coat, TPE;
 - Connector: Lightning 8P/M SOLDER TYPE,G/(P/N:1220806AP005);
 - Mold Material: Customized PLASTIC, Color: Black. Mold No.C1523.

Electrical Test Conditions:

- Conduction Test:100% qualified,No Open/Short circuit phenomenon
- Current:2.0A
- Voltage:DC 30V
- Insulation resistance: 5 Million ohm Min
- Patent number:ZL2022 2 2499175.4 and ZL 2019 2 0726041.7

UNLESS OTHERWISE SPECIFIED TOLERANCES	TITLE: 苹果T头3C充电教扁线
---------------------------------------	--------------------

DECIMALS: X	ANGLES: X	PART NO.	1220808AP30X
X.X	:±0.5	DWN	JER/YS
X.XX	:±0.3	CHKD	2022.10.12
X.XX	:±0.2	AP/VD	
		SCALE 1:1	UNIT: mm
		SIZE: A4	SHEET: 10/1
		CUSTOMER COPY	REV: A

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	JER/YS	2022.10.12

