


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

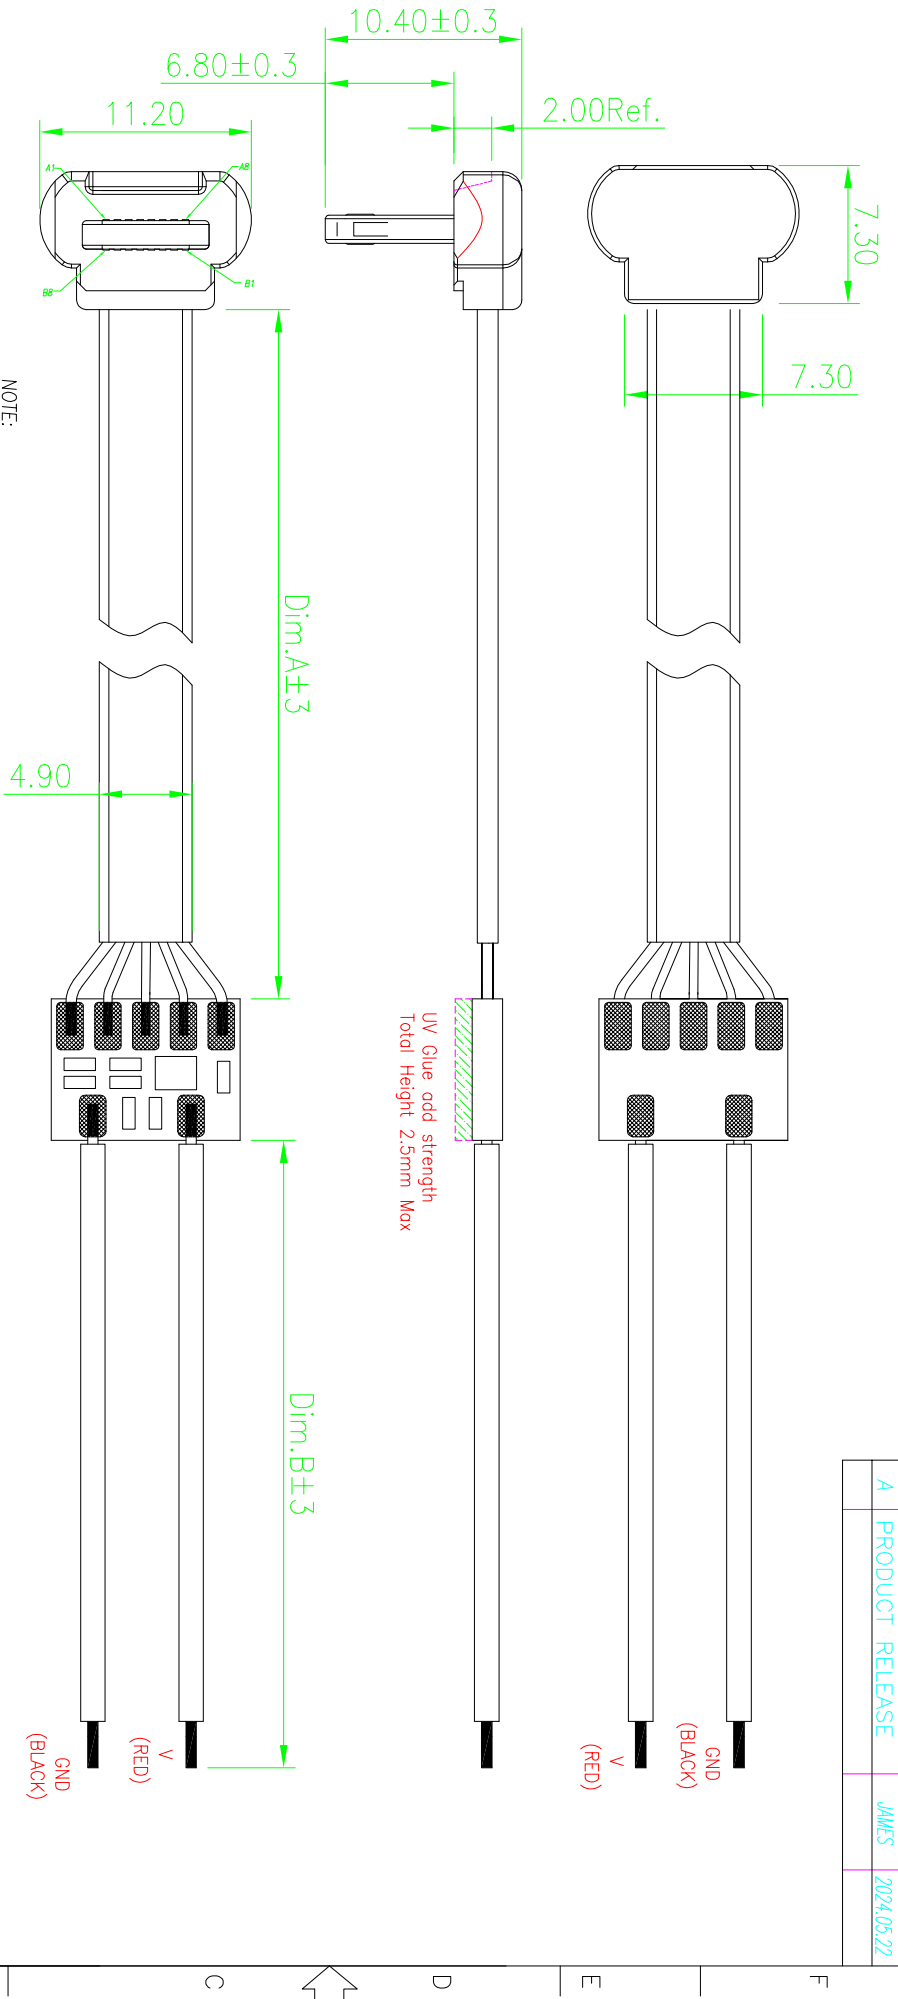

- NOTE:  
MATERIAL:  
1. CABLE: Flat Cable Enameled wire (10/0.08EC+Nylon)\*3C+ (30\*0.08EC+Nylon)\*2C 4.9\*1.2mm Black Wire,TPE  
2. Connector: Lightning 8P/M SOLDER TYPE,G/F(P/N:1220808AP006);  
3. Mold Material: Customized PLASTIC, Color: Black,Mold No.C1523  
Electrical Test Conditions:  
1. Conduction Test:100% qualified,No OPer/Short  
Circuit phenomenon  
2. Current:2.4A  
3. Voltage:DC 5V  
4. Insulation resistance: 5 Million ohm Min  
5. Internal resistance of wire rod per wire: 120 Micro ohm Max  
The LLCR of the plug is not included.  
6. Patent number:ZL2022 2 2499175.4 and ZL 2019 2 0726041.7

Dimension Information

60.0±3	100.0±3	1220808AP524
100.0±3	100.0±3	1220808AP522
Dim.A	Dim.B	Part No.

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	JAMES	2024.05.22

UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: 苹果T头5C 12W快充软扁线	
DECIMALS:	ANGLES:	PART NO.	See Table
X :±0.5	X :±2°	DWN	JAMES
X.X :±0.3	X.X :±1'	CHKD	2024.05.22
X.XX :±0.2		APVD	
CUSTOMER COPY		SCALE: 1:1	UNIT: mm
		SIZE: A4	SHEET: 10F1
			REV: B

