
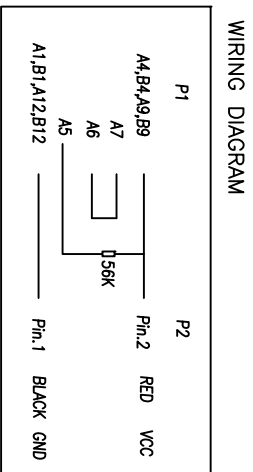

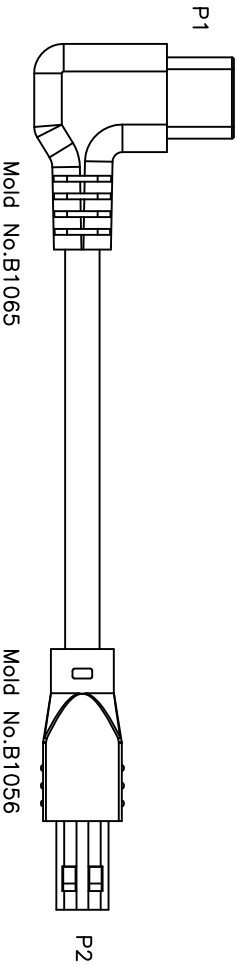
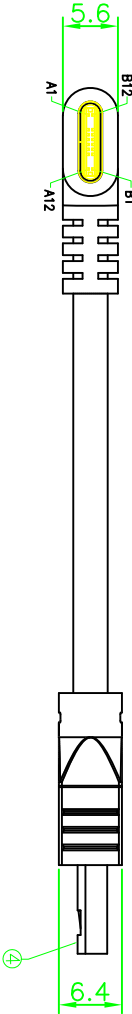


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

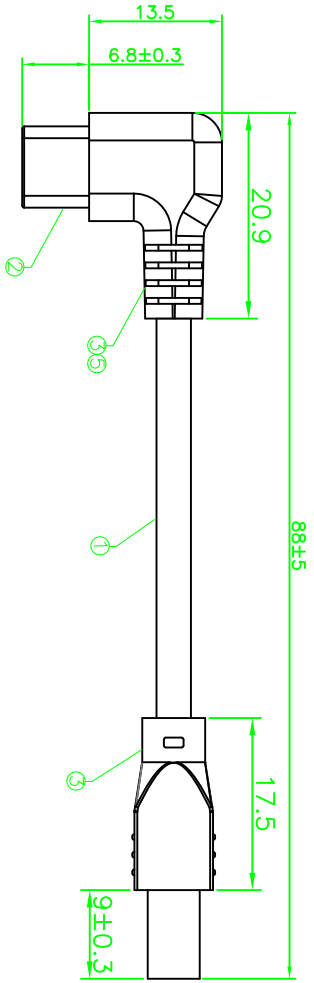

- MATERIAL:**
- CABLE: 2464 22AWG(17/0.15BC)*2C OD3.5,PVC
 - COLOR: BLACK; Wire Coat: Nylon Weaving.
 - Connector: USB C-TYPE/M SOLDER TYPE; T: Au 1u"; Shell: Steel, Nickel Plated
 - Mold Material: 45P PVC, Color: Black.
 - Connector: 2.54 SYP 2P/F; Terminal: Nickel plated.
 - PCB: FR-4 UL94V-0
- Electrical Test Conditions:**
- Conduction Test: 100% qualified, No Open/Short circuit phenomenon
 - Voltage: DC 30V;
 - Current: 3.0A
 - Insulation resistance: 5 Million ohm Min
 - On-state resistance: 0.5 ohm Max

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2024.06.27

UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: USB TYPE C/M TO 2.54 SYP 2P/F DC POWER CABLE L=88	
DECIMALS:	ANGLES:	PART NO. 1120213AP201	
X : ±0.5	X : ±2°	DWN	JAMES
X.X : ±0.3	X.X : ±1'	CHKD	2024.06.27
X.XX : ±0.2		APVD	
CUSTOMER COPY		SCALE 1:1	UNIT: mm
		SIZE: A4	SHEET: 10F1
			REV. A

