

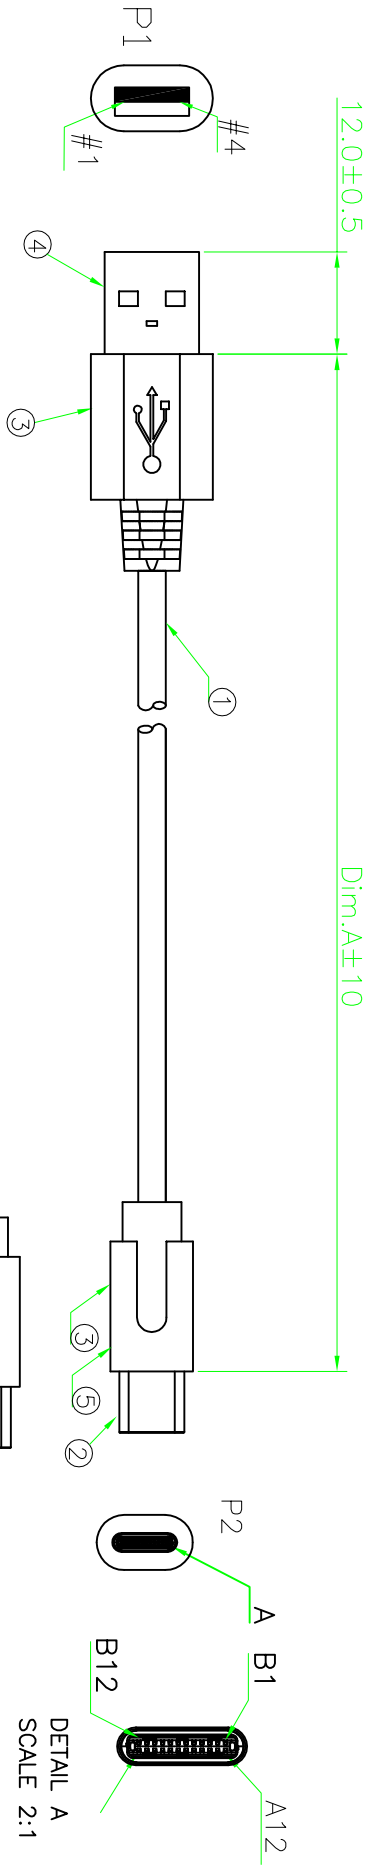


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

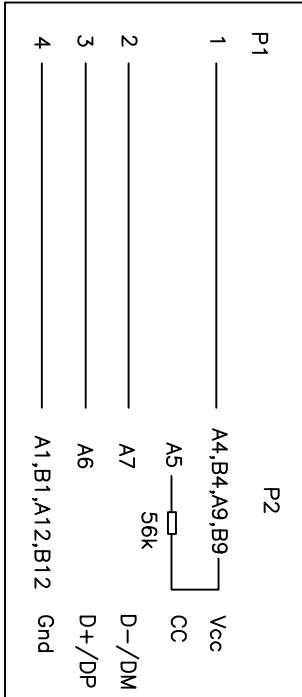

Dimension Information

Dim.A	Part No.
200	4102403AP404
500	4102403AP403
800	4102403AP402
1000	4102403AP401

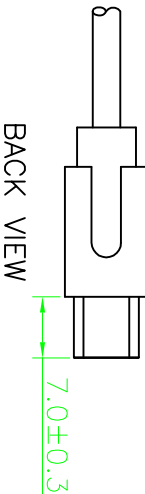

- NOTE:
- MATERIAL:
- CABLE:2464 22#(17/0.15BC)\*2C+(7/0.12BC)\*1P  
OD:3.5mm, Insulation: 70P PVC;COLOR:BLACK;Wire Coat:PVC.
  - Connector: USB C-TYPE/M SOLDER TYPE;T:1u",Shell:Steel,Nickel Plated(Full plastic Type)
  - Mold Material: 45P PVC, Color: Black.
  - Connector:USB A/M Solder Typ.;Shell:Spcc,Nickel plated; Terminal:G/F
  - PCB: FR-4 UL94V-0
- Electrical Test Conditions:
- Conduction Test:100% qualified,No Open/Short circuit phenomenon
- Voltage:DC 30V;
  - Current:3.0A
  - Insulation resistance: 5 Million ohm Min
  - On-state resistance: 1.0 ohm Max

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	ARC5	2024.09.05	

UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: 全塑USB TYPE C/M TO USB AM 4C测试数据线	
DECIMALS:	ANGLES:	PART NO.	4102403AP40X
X :±0.5	X :±2°	DWN	ARES
X.X :±0.3	X.X :±1'	CHKD	2024.09.05
X.XX :±0.2		APVD	
CUSTOMER COPY		SCALE 1:1	UNIT: mm
		SIZE: A4	SHEET: 10F1
		REV: A	

