
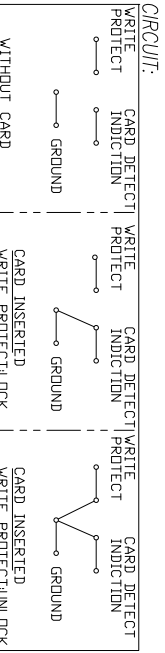
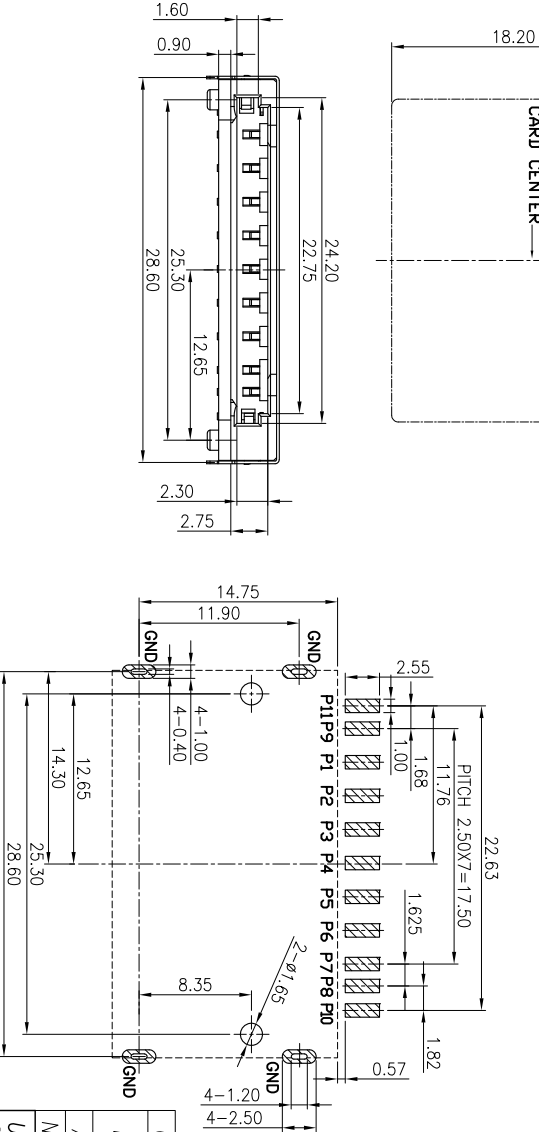
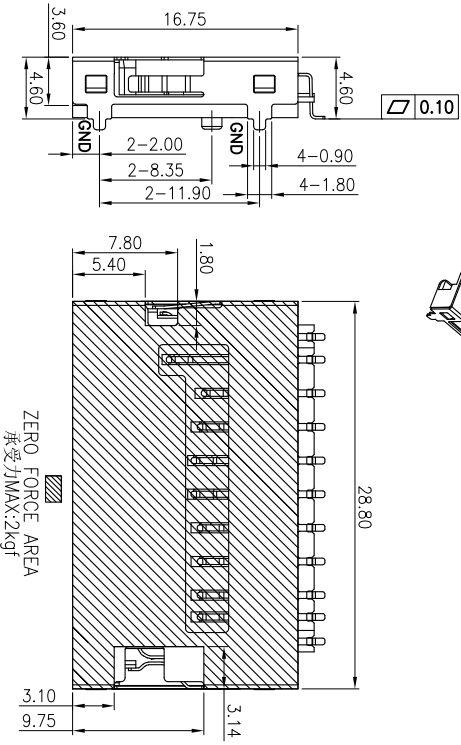
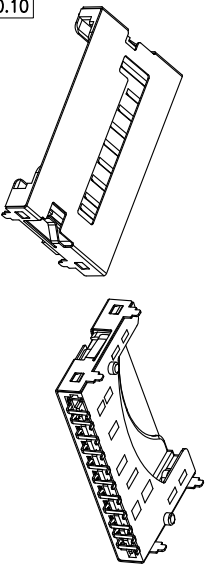
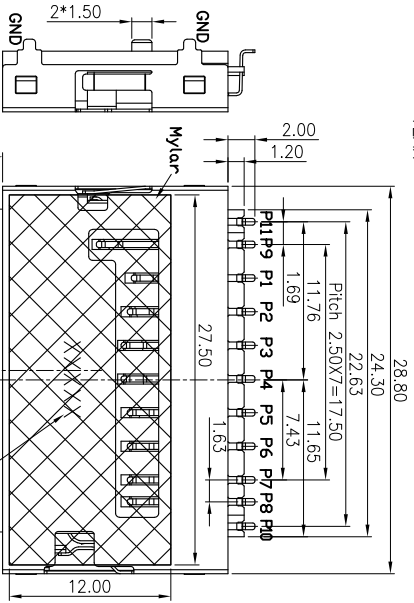


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

D/C ANNOTATION
X X X X X
DAY
WEEK
YEAR



- NOTE:
- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 5V MAX
 - CURRENT RATING: 0.5A MAX
 - CONTACT RESISTANCE: 100 milliohms MAX.
 - INSULATION RESISTANCE: 1000 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - MECHANICAL CHARACTERISTICS
 - MATING FORCE: 30N MAX.
 - UNMATING FORCE: 2N MIN.
 - DURABILITY: 5000 CYCLES
 - SALT SPRAY: 24H
 - OPERATING TEMPERATURE: -40°C~85°C
 - ROHS 2011/65/EU COMPLIANT.
 - MPQ : 350PCS/REEL.

Pin#	Name	Type	Description
P1	CD/DAT3	I/O/PP	Card Detect/ Date Line [BR3]
P2	CMD	PP	Command/Response
P3	Vss1	S	Supply voltage ground
P4	VDD	S	Supply voltage
P5	CLK	I	Clock
P6	Vss2	S	Supply voltage ground
P7	DAT0	I/O/PP	Date Line [BH0]
P8	DAT1	I/O/PP	Date Line [BH1]
P9	DAT2	I/O/PP	Date Line [BH2]
P10	WP	PP	WRITE PROTECT
P11	CD	PP	CARD DETECT

NO	DESCRIPTION	QTY	MATERIAL
C	SHELL	1	STAINLESS STEEL
B	CONTACT	11	COPPER ALLOY
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2'
X.X : ±0.3 X.X : ±1'
X.XX : ±0.2

TITLE: SD CARD 短体SMT板上四脚插板
4.6H 反句型

PART NO: 10S1102A014
DW: ZHARKO
CHKD: ZHARKO
APVD: 2020.04.18

SCALE 1:1 UNIT: mm

CUSTOMER COPY SHEET: 10F1 REV: A