

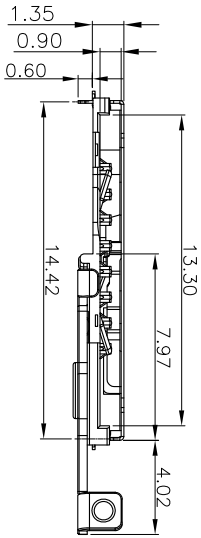
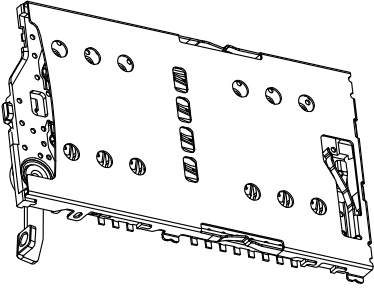


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

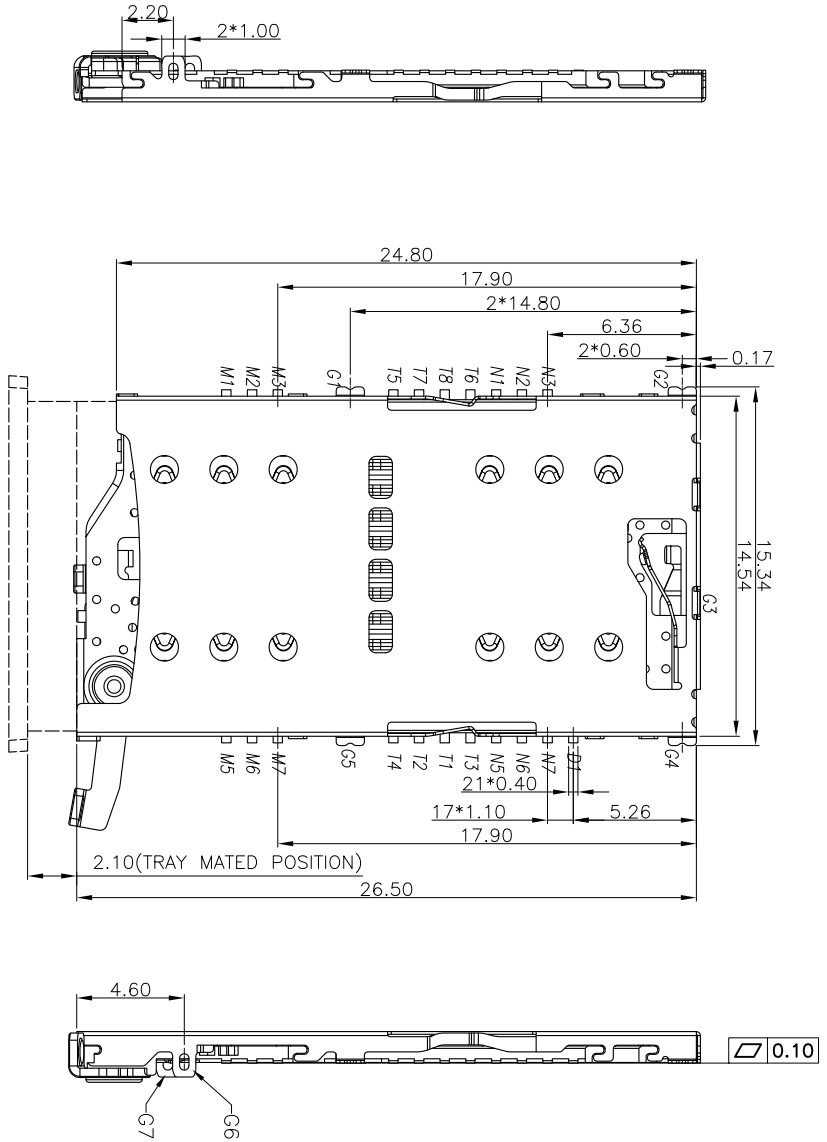

- SPECIFICATIONS :
- 1. ELECTRICAL CHARACTERISTICS
 - 1-1. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - 1-4. VOLTAGE RATING: 10V
 - 1-5. CURRENT RATING: 0.3A
 - 2. DURABILITY: 5000 CYCLES
 - 3. MPQ: 700PCS/REEL
 - 4. ROHS 2002/95/EC COMPLIANT.

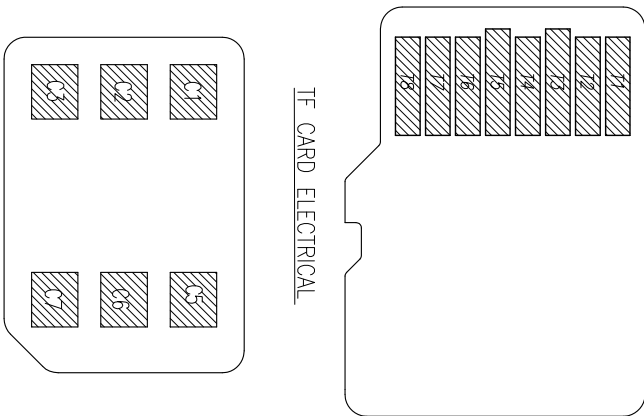

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	BROKEN	2015.11.28

ITEM	NAME	MATERIAL	QTY	PLATING & COLOR
D	CRANK	STAINLESS STEEL	1	
C	SHELL	STAINLESS STEEL	1	Au PLATING ON SOLDER TAILS, Ni UNDERPLATING OVER ALL
B	CONTACT	COPPER ALLOY	20	Au PLATING ON CONTACT AREA Au PLATING ON SOLDER TAILS Ni UNDERPLATING OVERALL
A	HOUSING	THERMOPLASTIC UL94 V-0	1	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2
 X.X : ±0.3 X.X : ±1
 X.XX : ±0.2

TITLE: NANO SIM2+TF CARD 20P三选
 二卡座中间扣点需做弹性外置 1.35H

PART NO. 1052001BR002

DWG BROKEN 2015.11.28

CHKD

APVD

SCALE 1:1 UNIT: mm

SIZE: A4 SHEET: 10F2 REV: A



CUSTOMER COPY

