

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.



1

2

3

4

5

6

7

8

1

2

3




4

5

6

7


8

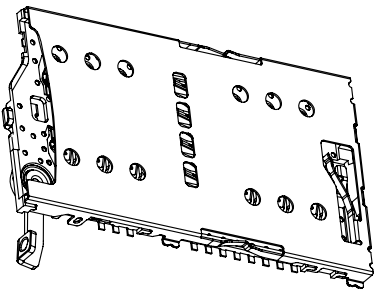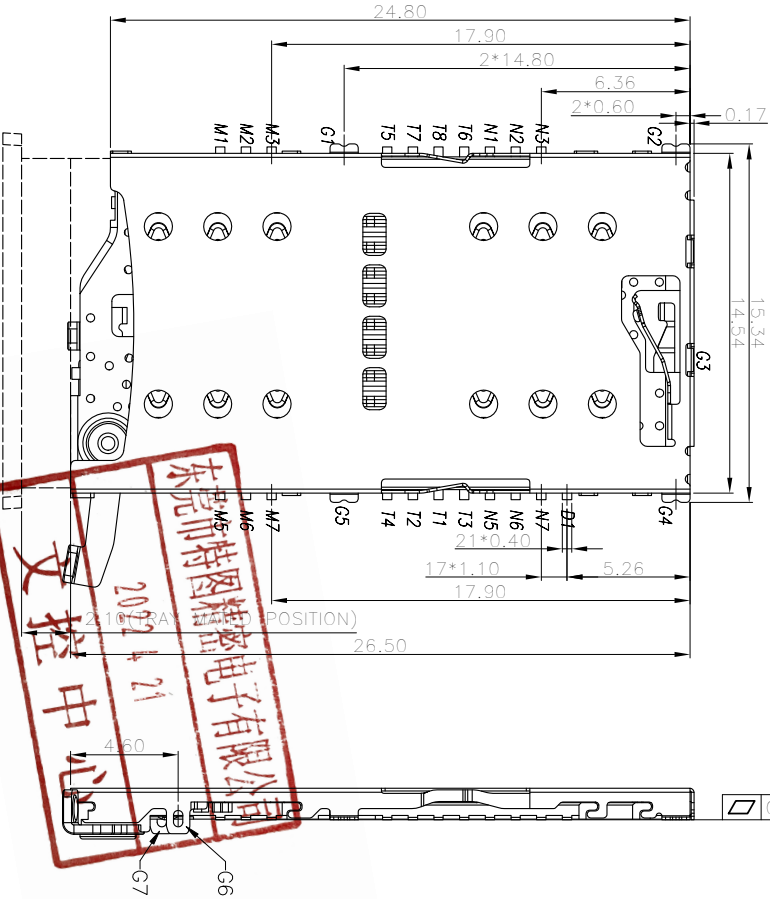


SPECIFICATIONS :

- 1. ELECTRICAL CHARACTERISTICS
 - 1-1. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - 1-4. VOLTAGE RATING: 10V
 - 1-5. CURRENT RATING: 0.3A
- 2. DURABILITY: 5000 CYCLES
- 3. MPO: 700PCS/REEL
- 4. RoHS 2002/95/EC COMPLIANT.

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	BROKEN	2015.11.28



TF CARD ELECTRICAL

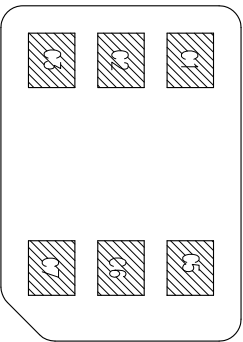

NANO SIM CARD ELECTRICAL

D	CRANK	STAINLESS STEEL	1	
C	SHELL	STAINLESS STEEL	1	Au PLATING ON SOLDER TAILS, NI UNDERPLATING OVER ALL
B	CONTACT	COPPER ALLOY	20	Au PLATING ON CONTACT AREA Au PLATING ON SOLDER TAILS NI UNDERPLATING OVERALL
A	HOUSING	THERMOPLASTIC UL94 V-0	1	
ITEM	NAME	MATERIAL	QTY	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE: NANO SIM+TF CARD 20P三选二卡盘中间加铁板排针外置 1.35H

PART NO. 1052001BR002

DWN BROKEN 2015.11.28

CHND

APVD

SCALE 1:1

UNIT: mm

CUSTOMER COPY

SIZE: A4

SHEET: 10F2

REV: A

Technical drawing of the P/N:1140101WT006 container, showing top and side views with dimensions.

Top View Dimensions:

- Overall Width: 27.50
- Overall Height: 14.10
- Internal Width (Right Side): 0.80
- Internal Height (Bottom): 1.80

Side View Dimensions:

- Overall Height: 14.10
- Internal Height (Bottom): 1.80

Labels and Features:

- Label "A" is located on the top right side of the container.
- The container has a rectangular shape with a central circular feature on the right side.
- The drawing includes a detailed view of the bottom edge showing the internal structure and the 1.80 height dimension.



CIRCUIT DIAGRAM FOR TRAY DETECT SWITCH	
WITH TRAY	WITHOUT TRAY

THESE AREA SHOULD BE FREE
OF ANY CONDUCTIVE TRACES

SMT SOLDER AREA

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:

	X	± 0.5	X	$\pm 2^\circ$
1	1	1	1	1
2	1	1	1	1
3	1	1	1	1
4	1	1	1	1
5	1	1	1	1
6	1	1	1	1
7	1	1	1	1
8	1	1	1	1
9	1	1	1	1
10	1	1	1	1
11	1	1	1	1
12	1	1	1	1
13	1	1	1	1
14	1	1	1	1
15	1	1	1	1
16	1	1	1	1
17	1	1	1	1
18	1	1	1	1
19	1	1	1	1
20	1	1	1	1
21	1	1	1	1
22	1	1	1	1
23	1	1	1	1
24	1	1	1	1
25	1	1	1	1
26	1	1	1	1
27	1	1	1	1
28	1	1	1	1
29	1	1	1	1
30	1	1	1	1
31	1	1	1	1
32	1	1	1	1
33	1	1	1	1
34	1	1	1	1
35	1	1	1	1
36	1	1	1	1
37	1	1	1	1
38	1	1	1	1
39	1	1	1	1
40	1	1	1	1
41	1	1	1	1
42	1	1	1	1
43	1	1	1	1
44	1	1	1	1
45	1	1	1	1
46	1	1	1	1
47	1	1	1	1
48	1	1	1	1
49	1	1	1	1
50	1	1	1	1
51	1	1	1	1
52	1	1	1	1
53	1	1	1	1
54	1	1	1	1
55	1	1	1	1
56	1	1	1	1
57	1	1	1	1
58	1	1	1	1
59	1	1	1	1
60	1	1	1	1
61	1	1	1	1
62	1	1	1	1
63	1	1	1	1
64	1	1	1	1
65	1	1	1	1
66	1	1	1	1
67	1	1	1	1
68	1	1	1	1
69	1	1	1	1
70	1	1	1	1
71	1	1	1	1
72	1	1	1	1
73	1	1	1	1
74	1	1	1	1
75	1	1	1	1
76	1	1	1	1
77	1	1	1	1
78	1	1	1	1
79	1	1	1	1
80	1	1	1	1
81	1	1	1	1
82	1	1	1	1
83	1	1	1	1
84	1	1	1	1
85	1	1	1	1
86	1	1	1	1
87	1	1	1	1
88	1	1	1	1
89	1	1	1	1
90	1	1	1	1
91	1	1	1	1
92	1	1	1	1
93	1	1	1	1
94	1	1	1	

X.X : ± 0.3 X.X : $\pm 1^\circ$

X.XX :±0.2



TITLE: NANO SIMx2+TF CARD 20P三选
二卡座中间扣点窄板推杆外置 1.35H

PART NO.	1052001BR002
----------	--------------

DWN	BROKEN	2015.11..

CHKD		
ISUS		

APVD		
COMET 1.1	UNIT	

CUSTOMER COPY	SIZE: A4	SHEET: 10F2	REV: A
---------------	----------	-------------	--------