ROHS Compliant

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	MIKE	2011.09.25
B	MODIFY	BROKEN	2013.12.10

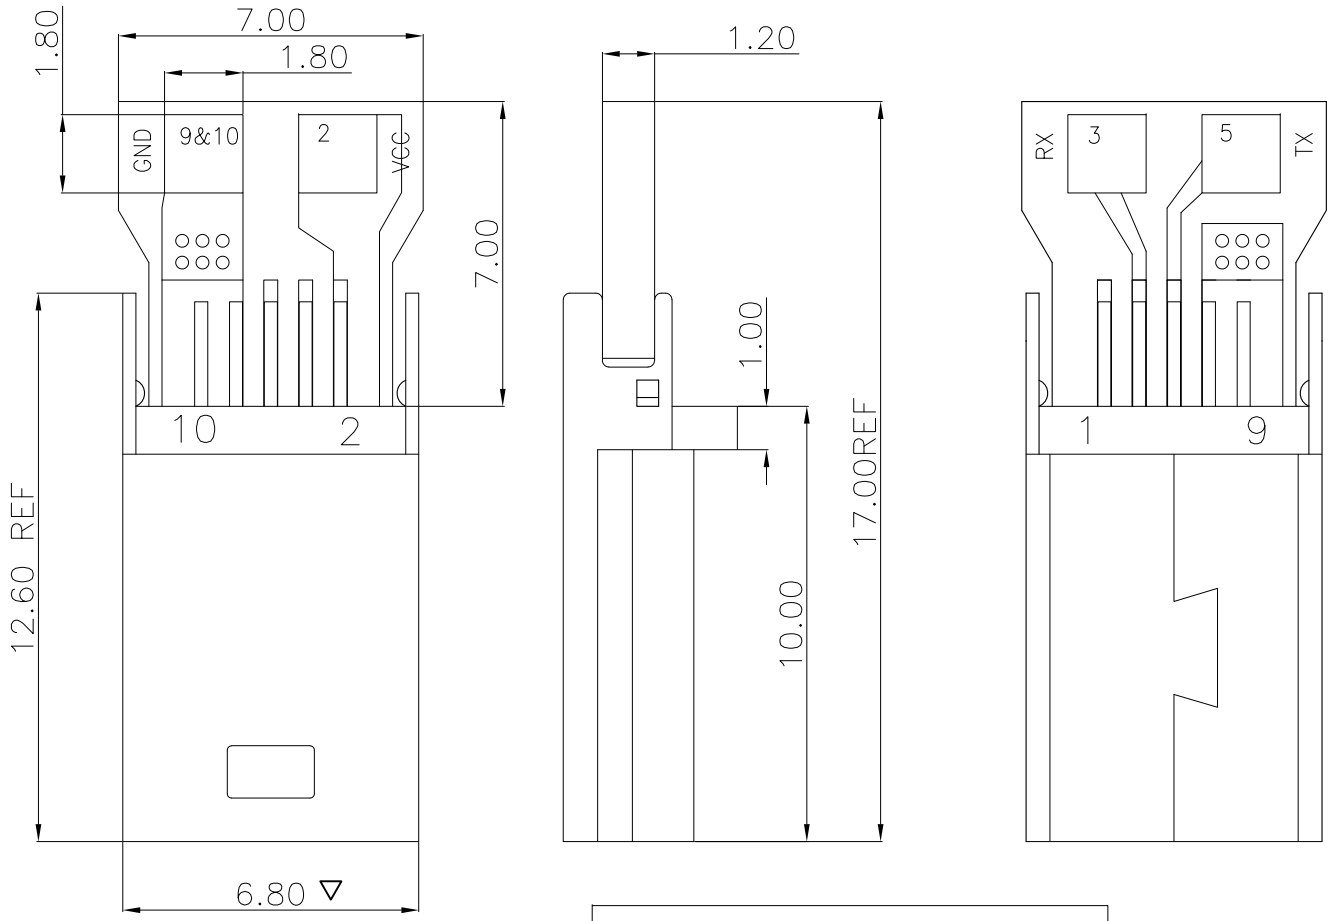

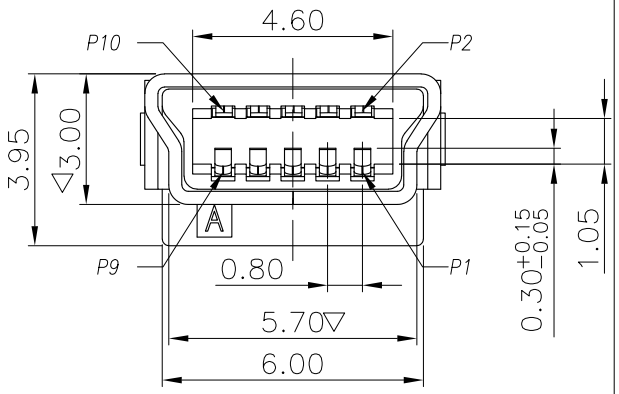

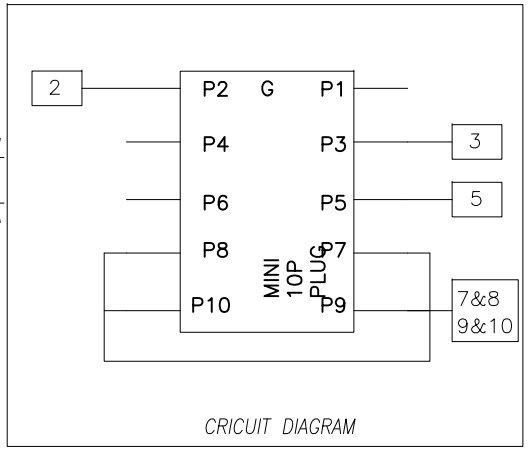

NOTE:

1. ELECTRICAL CHARACTERISTICS
   1-1. VOLTAGE RATING:30V AC
   1-2. CURRENT RATING:2.0A
   1-3. CONTACT RESISTANCE: 50 milliohms MAX.
   1-4. INSULATION RESISTANCE: 100 Megohms MIN.
   1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
   2-1. MATING&UNMATING FORCE: 0.7kgf~3.5kgf
   2-2. DURIBILITY:10000CYCLES
3. SALT SPRAY: 24H
4. OPERATING TEMPERATURE:-40°C~85°C
5. RoHS 2002/95/EC COMPLIANT.
6. CRITICAL DIMENSIONS : ▽

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	PCB	1	FR4-1	T-017
C	SHELL	1	SPCC 0.30t	Ni PLATING
B	CONTACT	10	C5191 0.20t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	LCP	BLACK

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: X :±0.5, X.X :±0.3, X.XX :±0.2

ANGLES: X :±2°, X.X :±1°

TETULL

CUSTOMER COPY

TITLE:	MINI 10P公头绿PCB铁壳L=17.0 (4点2、3、5、7-8-9-10)	
PART NO.	1031002GR040	
DWN	BROKEN	2013.12.10
CHKD		
APVD		
SCALE 1:1	UNIT: mm	
SIZE: A4	SHEET: 10F1	REV: B

TETULL CORPORATION