

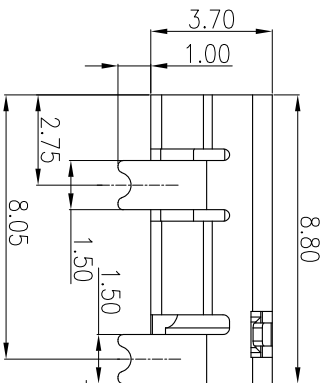
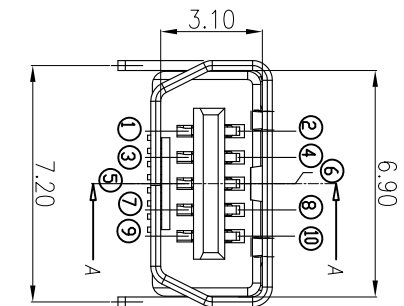
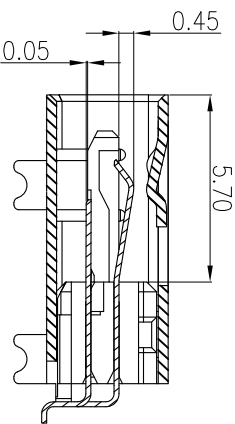


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

端子PIN脚定义:

PART	Upper five pinusb standard					below five pinextended function			
USB	P2	P4	P6	P8	P10	P1	P3	P7	P9
	VBUS	D-	D+		GND				

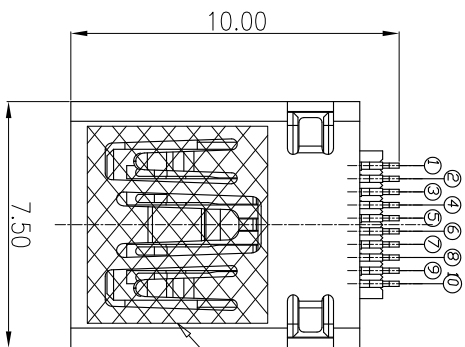

ALL SOLDER - TAIL & PAD


FLAT SURFACE

0.10 A

0.30


0.30

0.30

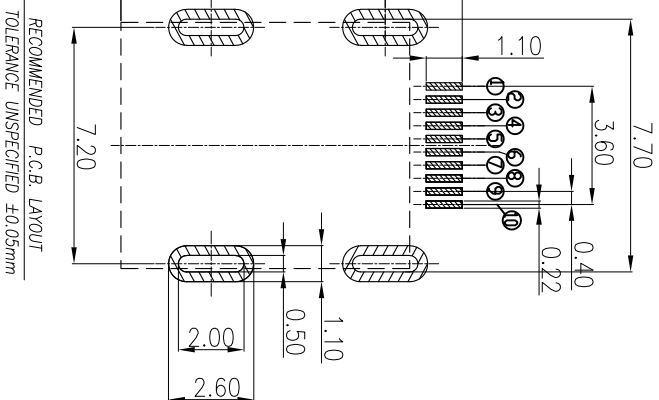

NOTE:

- ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 30V AC
- 1-2. CURRENT RATING: 2.0A
- 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
- 2-1. MATING & UNMATING FORCE: 0.7kgf ~ 3.5kgf
- 2-2. DURABILITY: 5000 CYCLES
3. OPERATING TEMPERATURE: -40°C ~ 85°C
4. PACKING NUMBER: 800PCS/REEL
5. ROHS 2002/95/EC COMPLIANT.

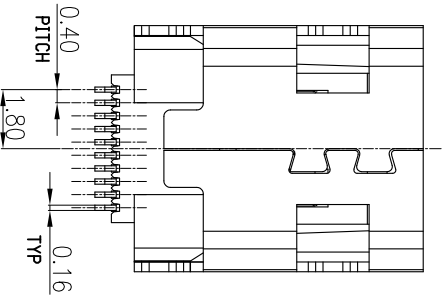

C	SHIELD	1	SPEC	0.3t	80µ"MIN Tin plated all over. 50µ" MIN Ni underplated.
B	TERMINAL	10	CS191	0.15t	10µ" Au plated on contact area 100µ" MIN Tin plated on Solder tail 50µ" MIN Ni underplated.
A	HOUSING	1	LCP E130 UL 94V-0		BLACK
NO	DESCRIPTION	QTY	MATERIAL		PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES					
DECIMALS:	ANGLES:				
X : ±0.5	X : ±2°				
X.X : ±0.3	X.X : ±1°				
X.XX : ±0.2					
TITLE:			Mini usb 10P #DIP		
PART NO.	1031001GR005		DWG JAMES 2017.09.25		
CHKD					
APVD					
SCALE 1:1	UNIT: mm				
CUSTOMER COPY	SIZE: A4	SHEET: 10F1	REV: A		

REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2017.09.25