
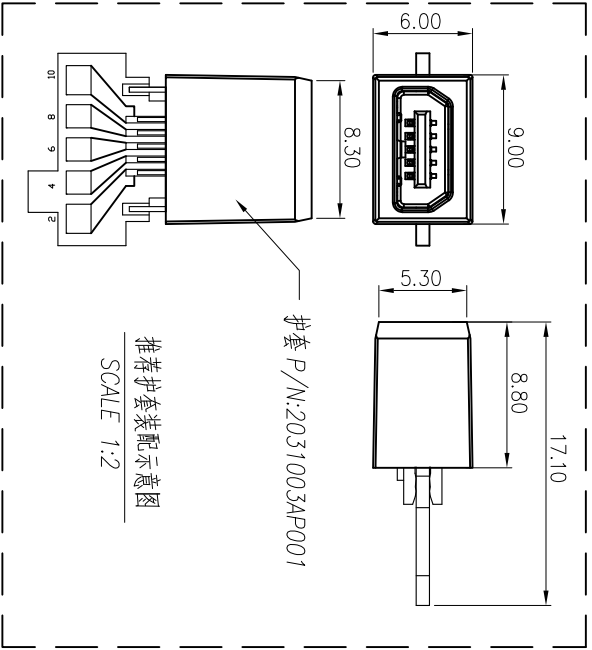


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

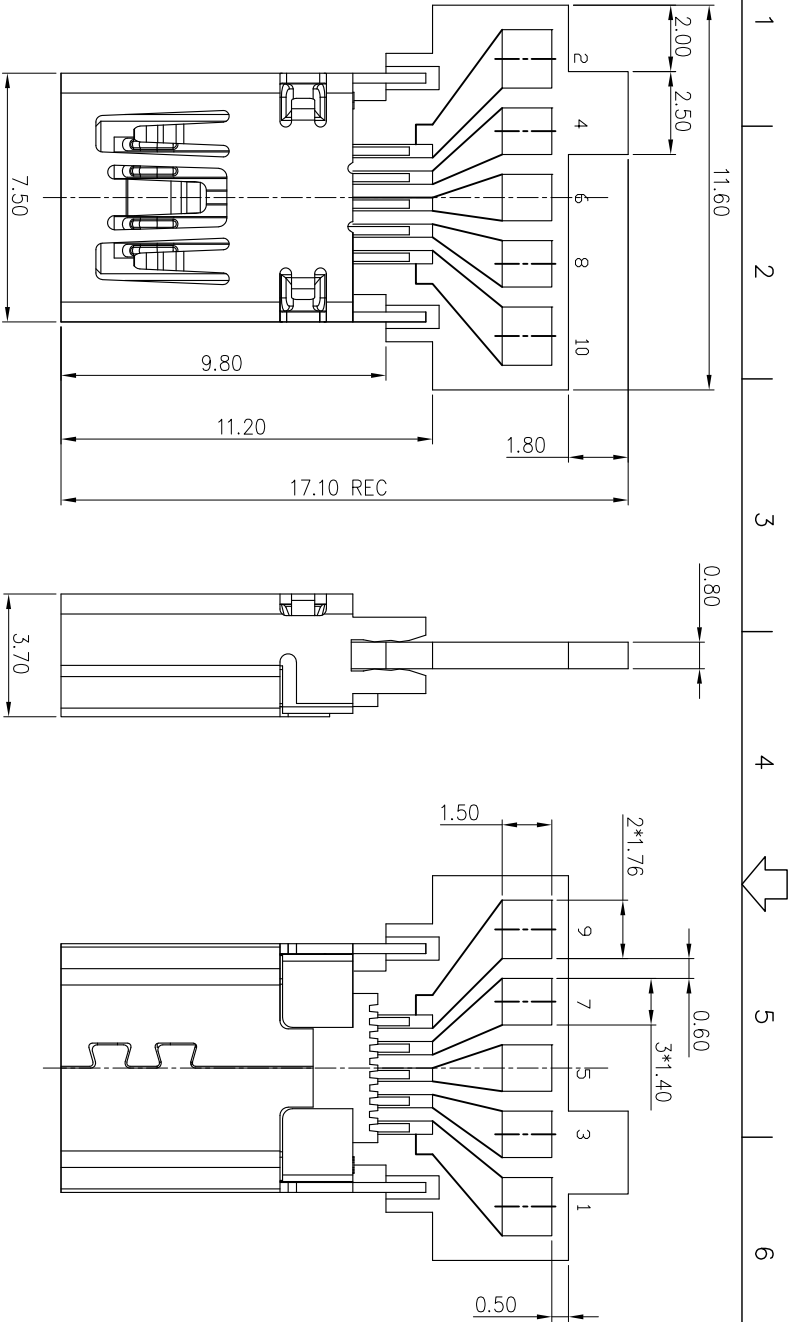

REV	ECN NO OR DESCRIPTION	REVISED	DATE
C	MODIFY	MKE	2021.12.20
D	增加护套装配示意图	ZHARKO	2023.11.13

NOTE:

- ELECTRICAL CHARACTERISTICS
  - VOLTAGE RATING: 30V AC
  - CURRENT RATING: 2.0A
  - CONTACT RESISTANCE: 50 milliohms MAX.
  - INSULATION RESISTANCE: 100 Megohms MIN.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
  - MATING&UNMATING FORCE: 0.7kgf~3.5kgf
  - DURIBILITY: 10000CYCLES
  - SALT SPRAY: 24H
  - OPERATING TEMPERATURE: -40C~85C
  - RoHS 2011/65/EU COMPLIANT.

D	PCB	1	FR-4	T-080
C	SHELL	1	STAINLESS STEEL 0.30t	N: PLATING
B	CONTACT	10	COPPER ALLOY 0.15t	Gold Flash On Contact Area Tin plated on Solder tail
A	HOUSING	1	THERMOPLASTIC U94-10	BLACK All over Nickel Plated.
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X	: ±0.5	X	: ±2°	
X.X	: ±0.3	X.X	: ±1'	
X.XX	: ±0.2			
TITLE: MINI USB 10*母板头板带PCB不锈钢壳 10*母点带线架式				
PART NO.		1031003AR010		
DWG		ZHARKO		
CHKD		2023.11.13		
APVD				
SCALE 1:1		UNIT: mm		
SIZE: A4		SHEET: 10F1		
CUSTOMER COPY		REV: D		

