



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

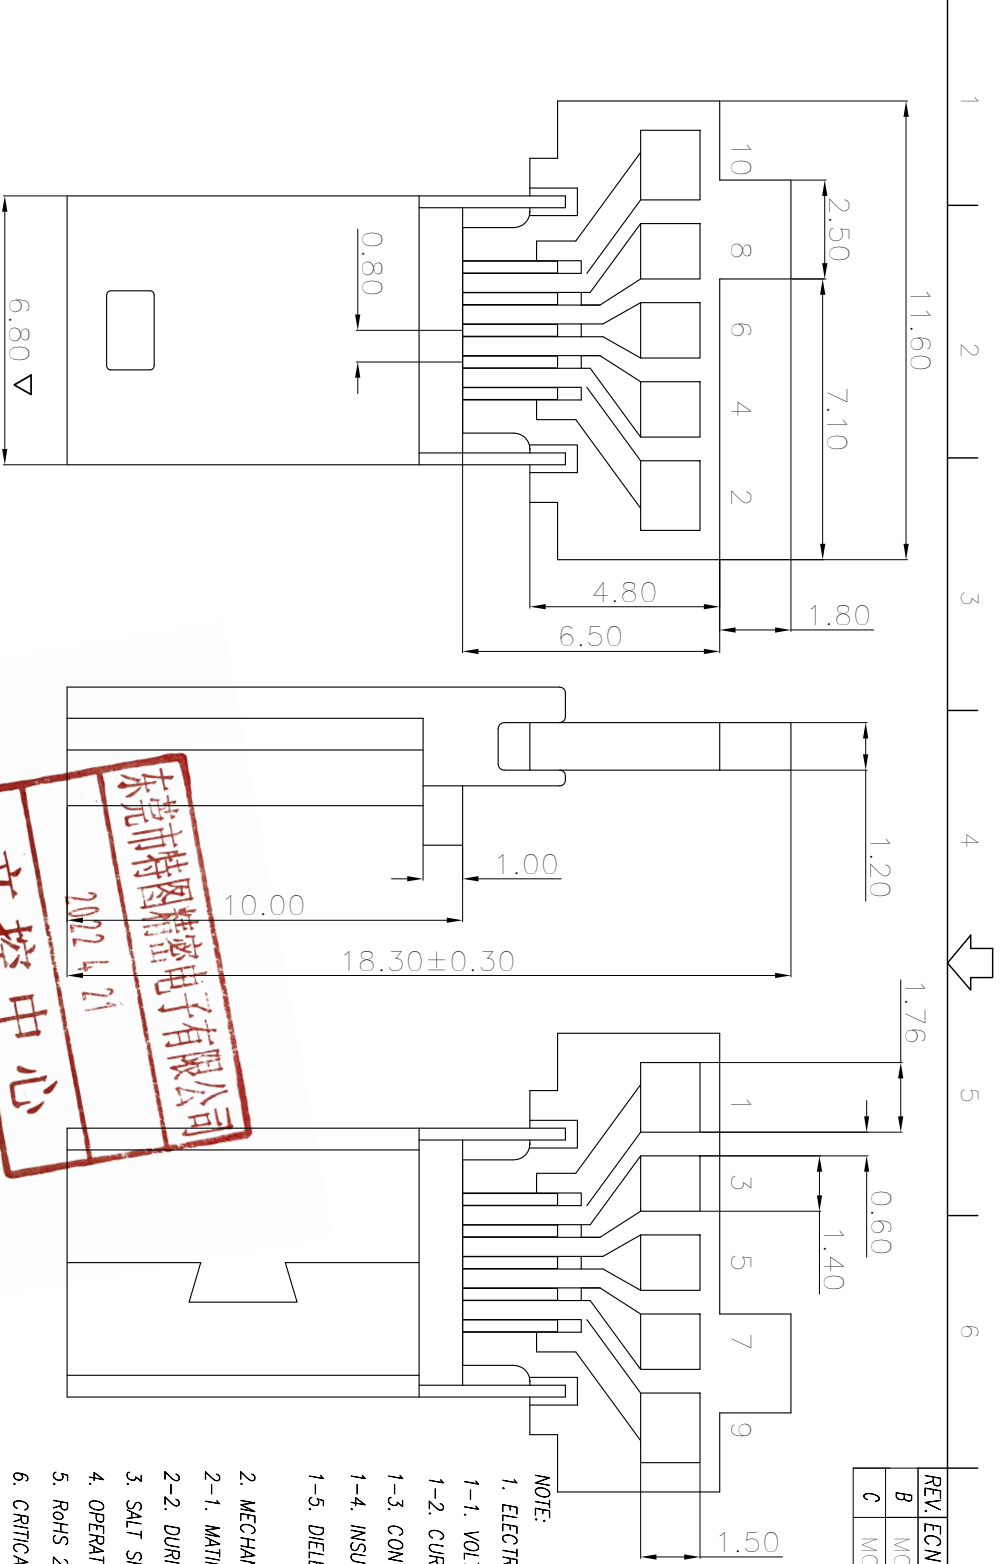

东莞市特图精密电子有限公司
 文控中心
 2022.4.21

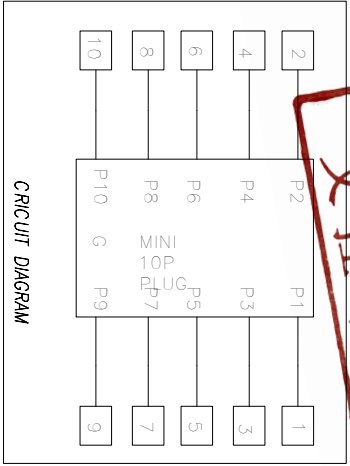

REV	ECN NO OR DESCRIPTION	REVISED	DATE
B	MODIFY	MKE	2021.11.03
C	MODIFY	MKE	2021.12.20

- NOTE:
- ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING:30V AC
 - 1-2. CURRENT RATING:2.0A
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - MECHANICAL CHARACTERISTICS
 - 2-1. MATING&UNMATING FORCE: 1.0kgf~2.0kgf
 - 2-2. DURIBILITY:10000CYCLES
 - 3. SALT SPRAY: 24H
 - 4. OPERATING TEMPERATURE:-40°C~85°C
 - 5. RoHS 2002/95/EC COMPLIANT.
 - 6. CRITICAL DIMENSIONS : ▽

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	PCB	1	FR4-1	T-081
C	SHELL	1	SPCC 0.30t	NI PLATING
B	CONTACT	10	CS191 0.20t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	LCP	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X.X : ±0.5 X : ±2°

X.XX : ±0.3 X.X : ±1°

X.XXX : ±0.2

TETULL

MINI 10P公头绿PCB板型=18.3 (10点) 带线美式

PART NO. 1031002GR094

DWG CHKD MIKE 2021.12.20

APVD

SCALE 1:1 UNIT: mm

CUSTOMER COPY SIZE: A4 SHEET: 10F1 REV: A