
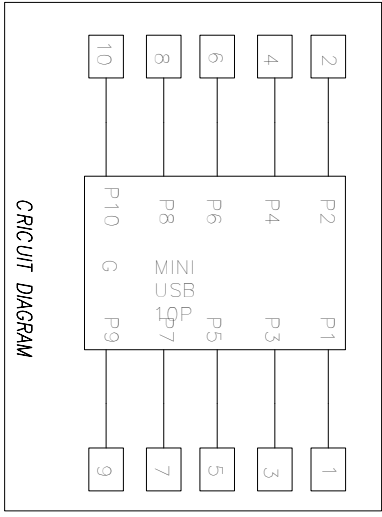
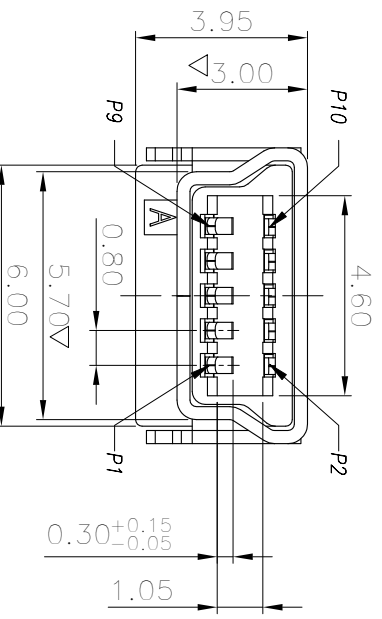
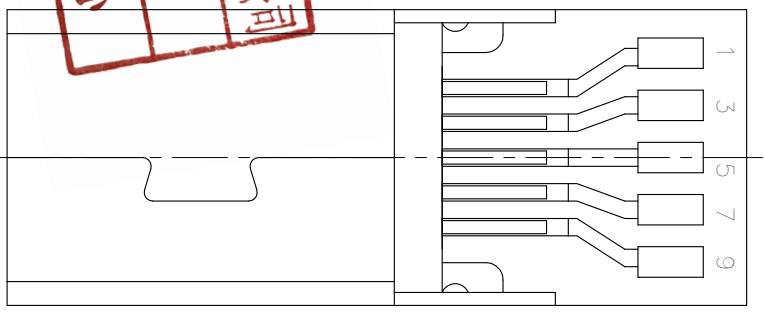
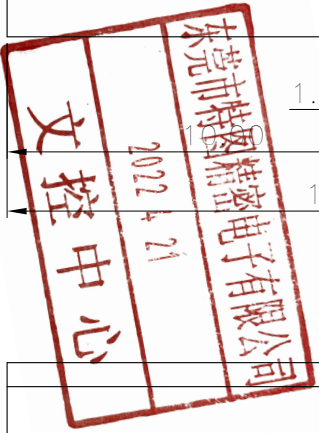
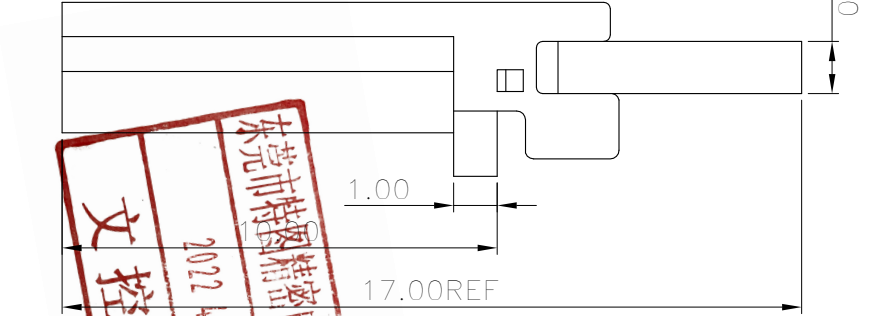


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

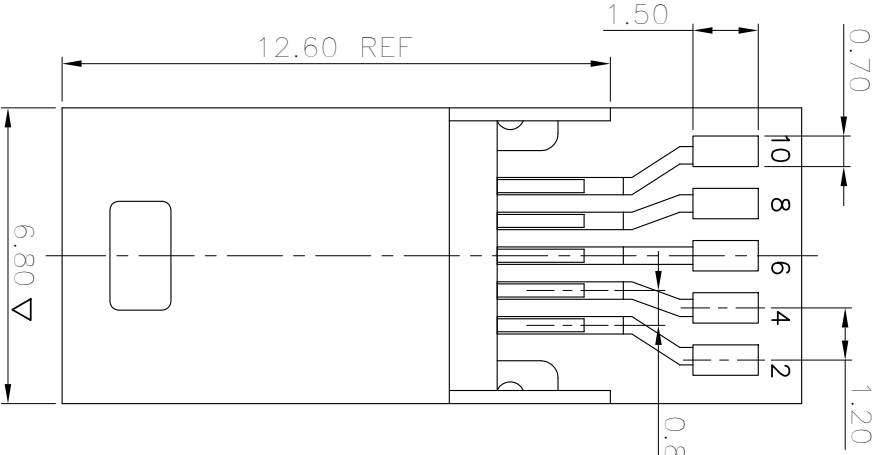

D	PCB	FR4-1	T-035
C	SHELL	SEE TABLE, 0.30H	SEE TABLE
B	CONTACT	C5191 0.20I	Gold flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING		BLACK
NO	DESCRIPTION	QTY	PLATING & COLOR

ITEM	P/N	SHELL NOTE	SALT SPRAY
1	1031002GR360	SPCC, NI PLATE	24H
2	1031002GR362	SPCC, Au PLATE	24H
3	1031002GR371	BRASS, NI PLATE	48H

REV/ECN	NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	MAKE	2021.6.12
B	MODIFY	BROKEN	2021.6.17

NOTE:
1. ELECTRICAL CHARACTERISTICS
1-1. VOLTAGE RATING:30V AC
1-2. CURRENT RATING:2.0A
1-3. CONTACT RESISTANCE: 50 milliohms MAX.
1-4. INSULATION RESISTANCE: 100 Megohms MIN.
1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS
2-1. MATING&UNMATING FORCE: 0.7kgf~3.5kgf
2-2. DURIBILITY:10000CYCLES
3. SALT SPRAY: 24H
4. OPERATING TEMPERATURE:-40°C~85°C
5. ROHS 2002/95/EC COMPLIANT.
6. CRITICAL DIMENSIONS : ▽

TABLE:
TITLE: MINI USB 10P PLUG CLAMP WITH PCB
PART NO. 1031002GR3XX
DWN BROKEN 2021.6.17
CHKD
APVD
SCALE 1:1 UNIT: mm
SHEET: 10F1 REV: B

