
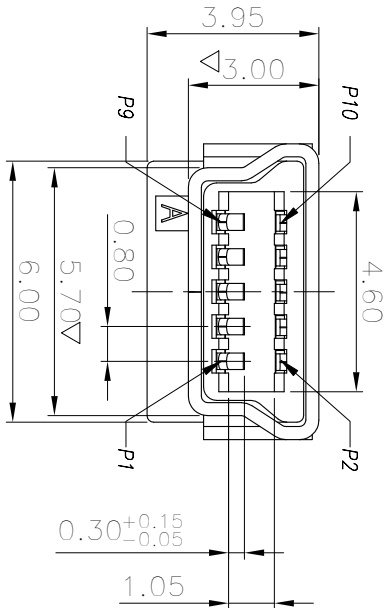
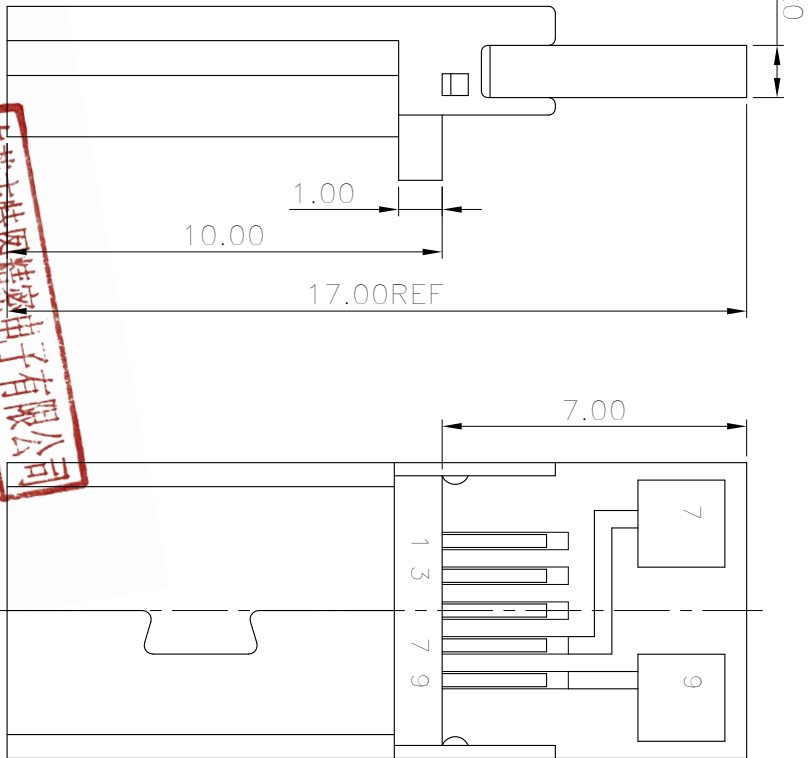



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

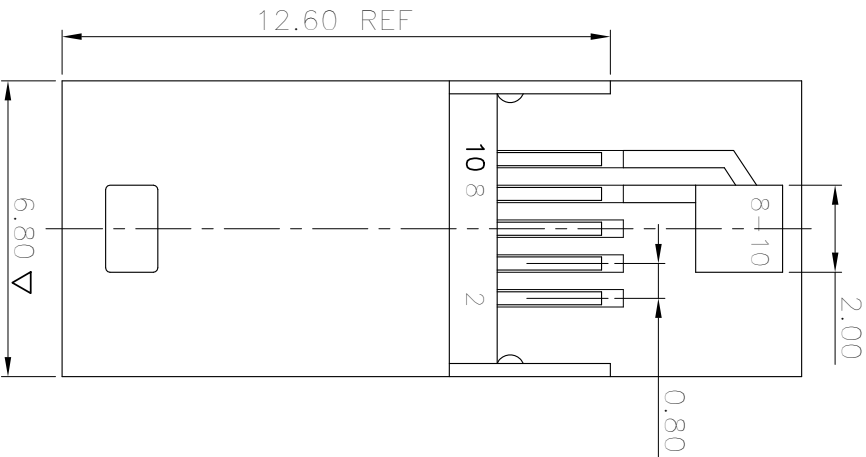

NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING:30V AC
 - 1-2. CURRENT RATING:2.0A
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING&UNMATING FORCE: 0.7kgf~3.5kgf
 - 2-2. DURIBILITY:10000CYCLES
 3. SALT SPRAY: 24H
 4. OPERATING TEMPERATURE:-40°C~85°C
 5. RoHS 2002/95/EC COMPLIANT.
 6. CRITICAL DIMENSIONS : ▽

东莞市特图精密电子有限公司
2022.4.21
文控中心

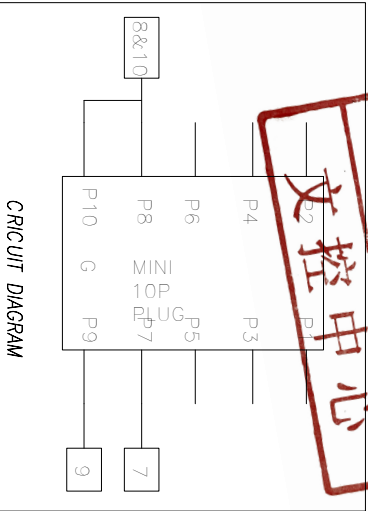

REV.	ECN	NO OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	MIKE	2011.09.25

D	PCB	1	FR4-1	
C	SHELL	1	SPEC 0.30t	
B	CONTACT	10	C5191 0.20t	Ni PLATING Gold flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: MINI 10P公头-绿(0.5英寸)=17.0 (3点T、9、8-10)		PART NO.	10310026R018	
DWG		MIKE	2011.09.25	
CHKD				
APVD				
SCALE 1:1		UNIT: mm		
CUSTOMER COPY		SIZE: A4	SHEET: 10F1	REV: A

