

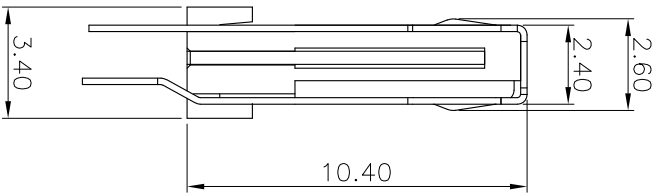



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

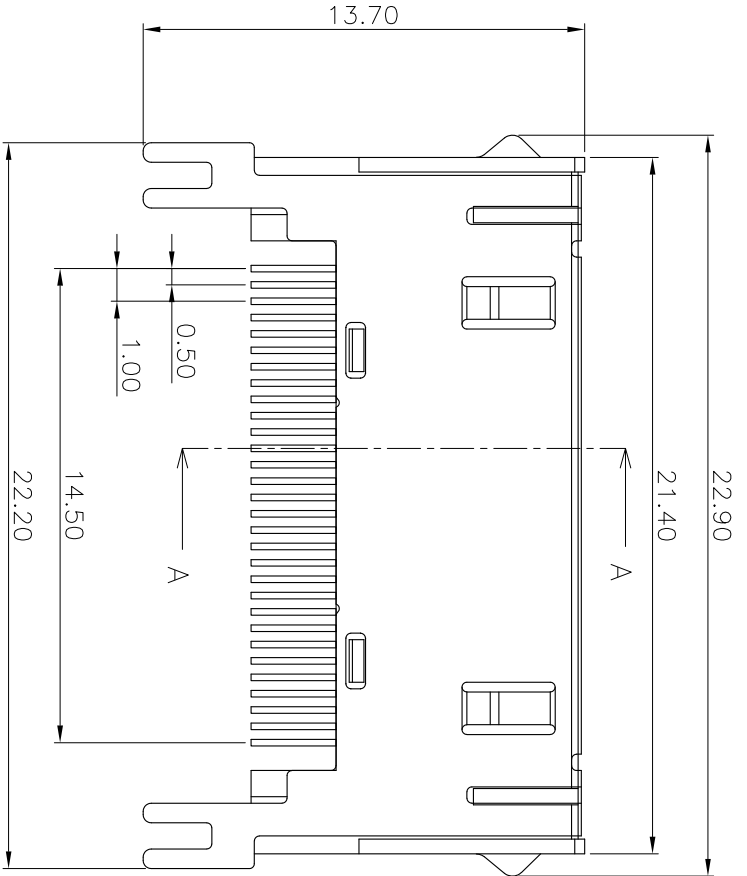

SECTION A-A

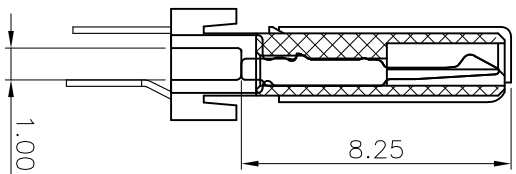

NOTE:
 1. ELECTRICAL CHARACTERISTICS
 1-1. VOLTAGE RATING: 30V AC
 1-2. CURRENT RATING: 1.0A
 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR 1 MINUTE.
 2. MECHANICAL CHARACTERISTICS
 2-1. DURABILITY: 5000CYCLES
 2-2. OPERATING TEMPERATURE: -40C~85C
 3.MPQ : 50PCS/TRAY.

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	MKE	2014.05.22

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	SHELL	1	SUS201 0.2t	Ni PLATING
C	LATCH	2	SUS201 0.4t	Ni PLATING
B	CONTACT	30	BRASS 0.2t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	ABS 1541	GRAY

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1'
X.XX : ±0.2	



TITLE:	PART NO.	DWG	CHKD	APVD	SCALE 1:1	UNIT: mm	SHEET: 10F1	REV: A
苹果4公头夹板式30P外壳插脚	1220808AP003							

CUSTOMER COPY	SIZE: A4	SHEET: 10F1	REV: A