
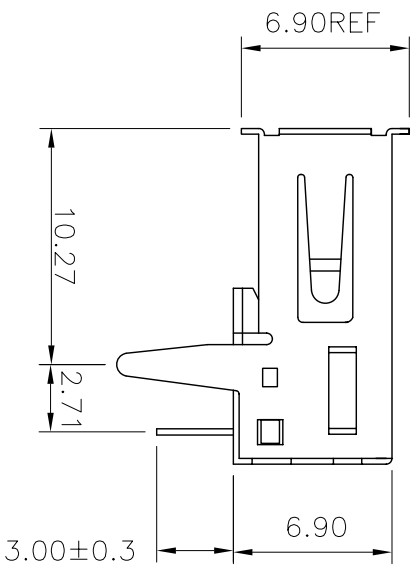


RECOMMENDED PCB LAYOUT
NORMAL TOL: ±0.05

NOTE:


1. ELECTRICAL CHARACTERISTICS
- 1-1. CONTACT RESISTANCE: 30 milliohms MAX.
- 1-2. INSULATION RESISTANCE: 1000 Megohms MIN.
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
- 2-1. RETENTION FORCE: MIN. 300gf/PIN
3. ROHS 2002/95/EC COMPLIANT.

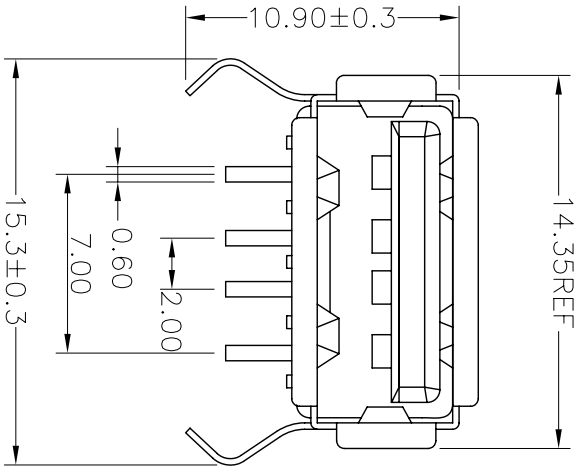

REV.	ZONE	DESCRIPTION	DESIGN	DATE
B		NEW	James	10/11-07

BLACK	1020401AT001
WHITE	1020401AT004
COLOR	P/N

ITEM	NAME	Q'TY	MATERIAL	FINISHED	NOTE
3	TERMINAL	4	COPPER ALLOY	G/F PLATING	CONTACT AREA: G/F TIN ON SOLDER-TAIL
2	SHIELD	1	SPCC/BRASS	NI PLATING	
1	HOUSING	1	THERMOPLASTIC		UL 94V-0; COLOR: BLUE; SEE TABLE



东莞市特图精密电子有限公司
Dongguan Tet Precision Electronics co., Ltd

Unless otherwise specified tolerances are

DRAW NO. FD071011-013

DATE 10/11-07

X. ±0.50

DWN James

DRAW NAME: USB A/F 4P 90D DIP STD TYP.

X.X ±0.35

CHK

P/N : 1020401ATXXX

X.XX ±0.25

APVD

X.XXX ±0.5

X° ±2.0°

FINISH MATERIAL UNIT SCALE REV SHEET

X.X° ±1.0°

SEE NOTES

mm 1:1 B 1 OF 1

Third Angle Project